


## YFQ4系列双电源自动切换装置（隔离型）



### 产品型号及含义

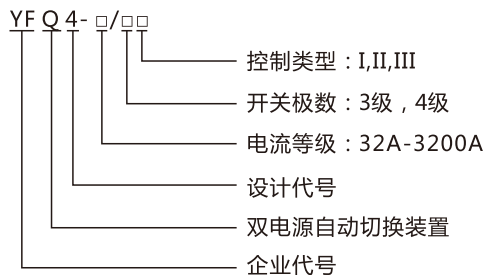

### 主要技术参数

壳架等级	100						250						630						1600						3200																																															
额定工作电流Ie(A)	32	40	50	63	80	100	125	160	200	225	250	315	350	400	500	630	800	1000	1250	1600	2000	2500	3200																																																	
额定绝缘电压Ui	690V												800V																																																											
额定冲击耐受电压Uimp	8kV																																																																							
额定工作电压Ue	AC400V																																																																							
使用类别	AC-33B												AC-33B																																																											
额定短路接通能力Icm	8kA						17kA						26kA						67.5kA																																																					
额定短时耐受电流Icw	5kA/30ms						10kA/60ms						12.6kA/60ms						32kA/60ms																																																					
转换时间 I-II或 II-I	2.5s						0.6s						1.2s						1.8s						2.4s																																															
控制电压	AC24V、48V、110V,AC220V																																																																							
电机额定功率	启动	20W						325W						355W						400W						440W						600W																																								
	正常	20W						62W						74W						90W						98W						120W																																								
重量 (kg) 4极	3.4						6.0						7.6						15.8						16.8						36						36						37						38.6						55						61						67					

### 开关结构说明

